


# Titanium Powder

## APPLICATION

Widely used in manufacturing P/M parts, friction disks, sheathing boards of brakes, diamond grinding wheels, and also used as the additives of rubbers and plastics, and in the production of chemicals.

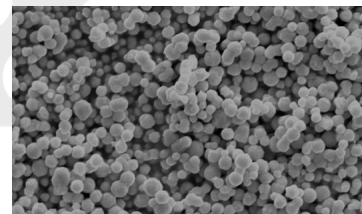

## SPECIFICATION

Grey powder with irregular form

### CNPC-Sn100

PHYSICAL COMPONENT %			
+ 100 mesh (%)	< 5	Apparent Density (g/cm <sup>3</sup> )	4.3-4.7
+ 200 mesh (%)	40-60	+ 325 mesh (%)	Balance

### CNPC-Sn200

PHYSICAL CHARACTER			
+ 200 mesh (%)	3-10	Apparent Density (g/cm <sup>3</sup> )	4.3-4.7
+ 325 mesh (%)	30-50	-325 mesh (%)	40-70

### CNPC-Sn300

PHYSICAL CHARACTER			
+ 200 mesh (%)	<1	Apparent Density (g/cm <sup>3</sup> )	4.3-4.7
+ 325 mesh (%)	<5	-325 mesh (%)	Balance

Sponge Titanium Powder purity include 99.5%,99%,98%

## DRUMS

--Size: Dia 30 cm x 30cm

--Net Weight:25kgs

